


NSD-II门模块 Door unit

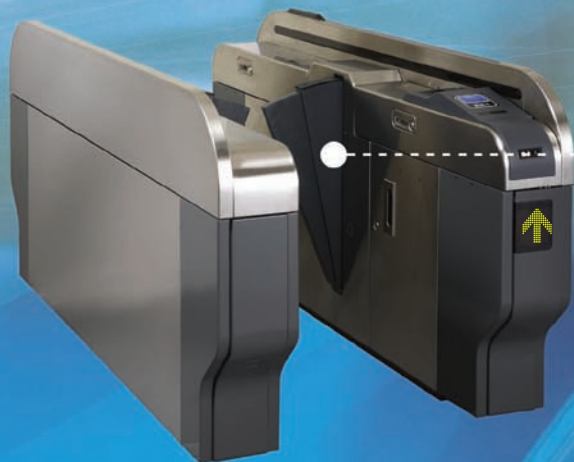

2-piece Swinging Flap Doors for Wide Passages New Units in the Product Range

折叠剪式门的2段剪式门
将模块加入商品种类

Features 产品特征

Smooth Operation 流畅的动作

Precise control of both flap doors ensure smooth switching.

最合理地控制2块折叠挡板，实现流畅的挡板开合。

High-strength, Low-cost 高强度、低成本

Parts are mounted to a U-shaped metal panel frame for increased strength and reduced costs.

通过在U字型金属板架上安装零部件，实现了高强度和低成本。



■Head Office:

Sunshine 60, 1-1, Higashi-Ikebukuro, 3-chome, Toshima-ku, Tokyo 170-6047, Japan
TEL: (81-3)-5954-4600 FAX: (81-3)-5954-4610

■Beijing Office:

The Hotel Nikko New Century Beijing Office 757Room, No.6 Southern Road, Capital Gym, Haidian, District, Beijing
TEL: (86-10)-6836-2510 FAX: (86-10)-6836-2196 Inquiries: imai-ky@signal.co.jp


■总部:

东京都丰岛区东池袋3-1-1 (阳光大厦60) TEL (81-3) -5954-4600 FAX (81-3) -5954-4610

■北京代表处:

中国北京海淀区首体南路6号北京新世纪日航饭店写字楼757室
TEL: 010-6836-2510 FAX: 010-6836-2196 查询 imai-ky@signal.co.jp

External Appearance 外形图

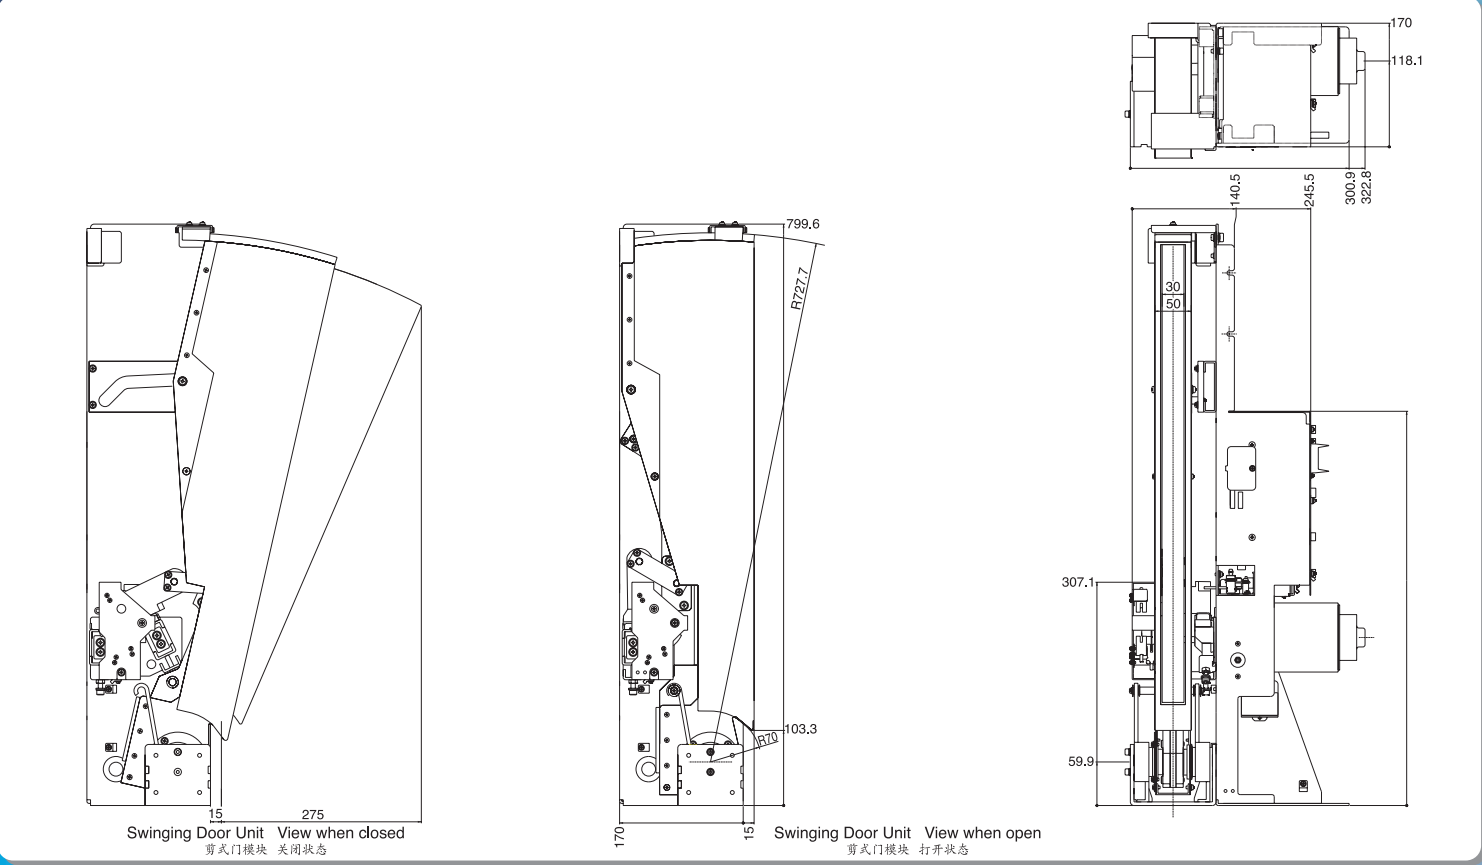

General Specifications 一般规格

External Dimensions 外形尺寸	Housing Dimensions:W200±3xH1000±3xL2000±3(mm) Unit DimensionsWithin:W170±3xH840±3xL300±3(mm) 箱体尺寸:W200±3×H1000±3×L2000±3(mm) 模块尺寸:W170±3×H840±3×L300±3(mm)以内
Passage Width 通道宽度	550mm
Weight 重量	20Kg or less 20Kg以下
Noise (Operating Noise) 噪音 (运作时)	70dB or less (※when attached to our Drive Control Board and housings) 70dB以下 (※安装在本公司驱动底座及箱体上时)
Durability 耐用度	3 million cycles or 7 years (※when attached to our Drive Control Board and housings) 300万次或7年 (※安装在本公司驱动底座及箱体上的情况)
Power Supply 电源	AC: 220V -15% +10% DC: 5V±10% DC: 15V±10% DC: 24V±10%
I/F Connector I/F连接器	AC Motor: AMP D-3200S Series 1-179553-4 (housing), 175289-2 (contact) Brakes: AMP EI Series 172211-2 (housing), 170429-3 (contact) Lock Solenoid: AMP EI Series172211-2 (housing), 170429-3 (contact) Sensor: AMP EI Series 172211-3 (housing), 170429-3 (contact) AC马达用: AMP制造 D-3200S系列1-179553-4 (插孔)、175289-2 (接头) 制动器用: AMP制造 EI系列172211-2 (插孔)、170429-3 (接头) 锁止电磁线圈用: AMP制造 EI系列172211-2 (插孔)、170429-3 (接头) 传感器用: AMP制造 EI系列E172211-3 (插孔)、170429-3 (接头)
Door Switching Speed 门开关的速度	Open⇒Close Close⇒Open 0.5 seconds or less (开⇒合、合⇒开 0.5秒以下)
Parts requiring regular replacement 定期交换零件	Stoppers, springs etc 锁挡、弹簧等等
Options 任选附件	Power Supply / Drive Control Board 电源部 / 驱动底座

Designs and its' specifications shall change without a notice
设计,规格发生变动恕不另行通知.